

# DUMAWALL+ WATERPROOF WALL TILES



## PURPOSE

PSP Ltd supplies Dumawall+ Waterproof Wall Tiles for use as a waterproof interior surface finish.


## DUMAWALL+ WATERPROOF WALL TILES EXPLAINED

Dumawall+ Waterproof Wall Tiles are 5 mm thick uPVC tiles, with an interlocking tongue and groove profile on all four edges. The tiles are installed using adhesive. Dumawall+ Waterproof Wall Tiles are available in the following sizes:

- › 375 mm x 650 mm (ex-stock)
- › 375 mm x 1200 mm (indent)
- › 500 mm x 900 mm (indent)
- › 500 mm x 1200 mm (indent).

PSP provides the following Dumawall Aluminium trims:

- › finishing trim
- › click finishing trim
- › universal corner 12-20 mm
- › inside corner 12 mm
- › L-trim outside corner 16-12 mm
- › start trim.

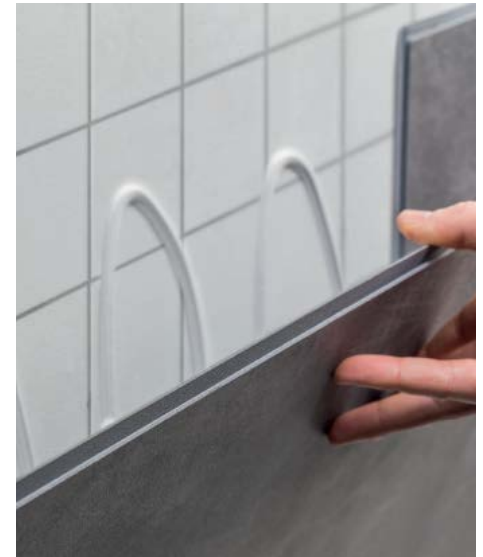


For further assistance please contact:

- ☎ 0800 786 883
- ✉ info@psp.co.nz
- 🌐 [www.dumawall.co.nz](http://www.dumawall.co.nz)



## SCOPE AND LIMITATIONS OF USE

Scope	Limitations
<b>Building</b> On any internal wall panel substrate that complies with the NZ Building Code or where the designer and/or installer have established that the substrate is suitable for the intended building work.	<ul style="list-style-type: none"> <li>› In buildings where material group number 3 or greater is permitted.</li> <li>› Not to be installed behind heat sources such as hobs.</li> <li>› Adhesive to be Dumafix PVC glue or SikaFlex 123 MS.</li> </ul>

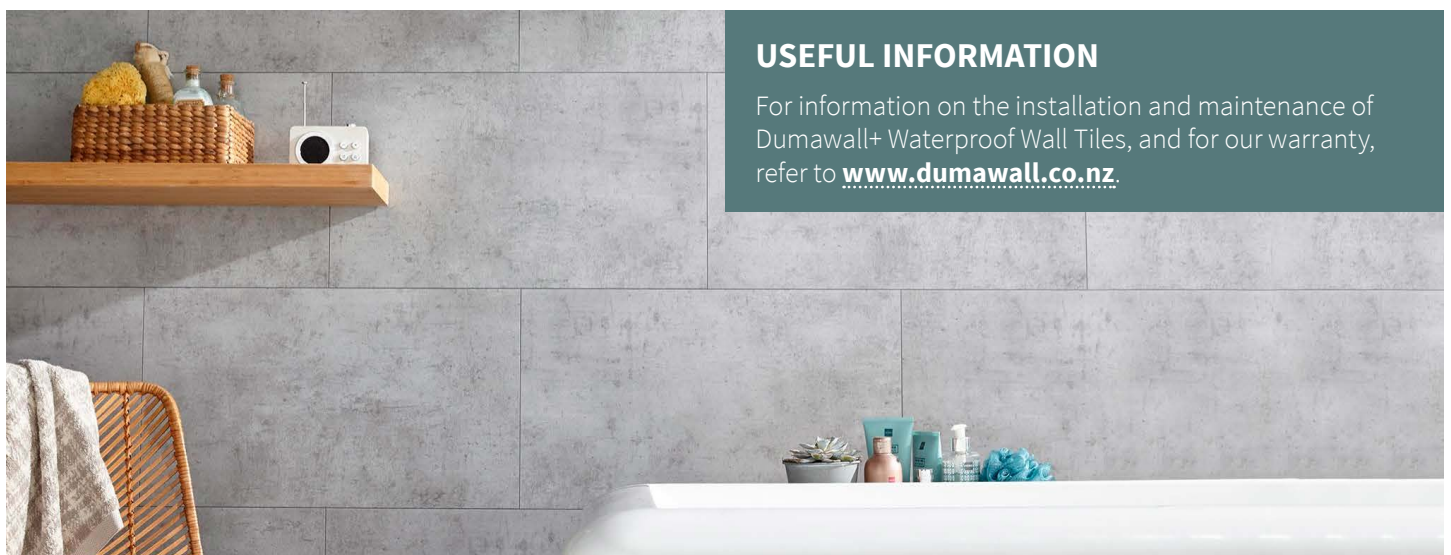

## USEFUL INFORMATION

For information on the installation and maintenance of Dumawall+ Waterproof Wall Tiles, and for our warranty, refer to [www.dumawall.co.nz](http://www.dumawall.co.nz).

## PERFORMANCE CLAIMS

If designed, installed and maintained in accordance with all PSP Ltd requirements, Dumawall+ Waterproof Wall Tiles will comply with or contribute to compliance with the following performance claims.

NZ Building Code clauses	BASIS OF COMPLIANCE	
	Compliance statement 1	Demonstrated by
<b>B1 Structure</b> B1.3.1 B1.3.2 B1.3.3 (a, j, q)	ALTERNATIVE SOLUTION EN 13245-2:2008.	<ul style="list-style-type: none"> <li>› Manufacturer certified with CE mark to EN 13245-2:2008.</li> <li>› Passed uPVC impact resistance test at 23°C.</li> </ul>
<b>B2 Durability</b> B2.3.1 (c)	ALTERNATIVE SOLUTION EN 13245-2:2008.	<ul style="list-style-type: none"> <li>› Manufacturer certified with CE mark to EN 13245-2:2008.</li> <li>› Passed uPVC impact resistance test at 23°C.</li> </ul>
<b>C3 Fire affecting areas beyond the source</b> C3.4 (a)	ACCEPTABLE SOLUTION EN 13501-1:2013. MBIE Guidance.	<ul style="list-style-type: none"> <li>› Manufacturer certified with CE mark to EN 13245-2:2008.</li> <li>› Material Group 3: Class D EN 13501-1:2013.</li> <li>› Crepim determination based on testing carried out by manufacturer.</li> <li>› Crepim accredited for testing.</li> </ul>
<b>E3 Internal Moisture</b> E3.3.4 E3.3.5 E3.3.6	ALTERNATIVE SOLUTION EN 13245-2:2008.	<ul style="list-style-type: none"> <li>› Manufacturer certified with CE mark to EN 13245-2:2008.</li> </ul>
<b>F2 Hazardous Building Materials</b> F2.3.1	ALTERNATIVE SOLUTION EN 16516:2017 ISO 16000 (PARTS 3, 6, 9, 11) 2006-2011 DEPENDING ON PART EN 717-1:2004	<ul style="list-style-type: none"> <li>› Tested by Eurofins for VOC emissions and formaldehyde release to EN 16516:2017, ISO 16000 (parts 3, 6, 9, 11) 2006-2011 depending on part, and EN717-1:2004.</li> <li>› Eurofins accredited for testing.</li> </ul>

1. The Compliance Statement is the pass holder's statement that they have met their obligations under s14G(2) of the Building Act 2004.

## SOURCES OF INFORMATION<sup>2</sup>

The following information was relied upon to prepare this pass:

- › EN 13245-2:2008 PVC-U profiles and PVC-UE profiles for internal and external wall and ceiling finishes.
- › Eurofins Product Testing: VOC Emission Test Report 7/08/2018.
- › Crepim: Classification report of reaction to fire performance 1039/117/236A 16/11/2017.

2. Sources of information also include the Building Act 2004 and its regulations, including the Building Code (Schedule 1 of the Building Regulations 1992), Acceptable Solutions and Verification Methods, and relevant cited standards.

- › CE Declaration of performance: Dumaplast DPO-CPR-6 28/05/2017.

Scan or click this QR code for a full download of Compliance Documentation for this pass™.  
[www.dumawall.co.nz](http://www.dumawall.co.nz)



**VERSION:**  
.....

**DATE:**  
.....

*Note: Uncontrolled in printed format.*

**NAME:**  
.....

Vaughan Brown

**POSITION:**  
.....

Business Unit Manager –  
Building Brands

Signed on behalf of PSP NZ:



By signing this pass™ the signatory confirms that, in respect of the subject of this pass™, the company has met their s14G obligations under the Building Act 2004.

320 Rosedale Road, Albany or PO Box 101 851 NSMC, Auckland 0745 › 0800 786 883 › [info@psp.co.nz](mailto:info@psp.co.nz) › [www.dumawall.co.nz](http://www.dumawall.co.nz)

This Product Assurance Supplier Statement (pass™) has been prepared by TBB in accordance with MBIE PTS guidelines and the recommendations of s9.2, Determination No. 2019-011 (issued 12 April 2019). TBB is ISO9001:2016 certified. Copyright © 2017, The Building Business Limited (TBB). All rights reserved.