

DUMAWALL+ WATERPROOF WALL TILES



PURPOSE

PSP Ltd supplies Dumawall+ Waterproof Wall Tiles for use as a waterproof interior surface finish.


DUMAWALL+ WATERPROOF WALL TILES EXPLAINED

Dumawall+ Waterproof Wall Tiles are 5 mm thick uPVC tiles, with an interlocking tongue and groove profile on all four edges. The tiles are installed using adhesive. Dumawall+ Waterproof Wall Tiles are available in the following sizes:

- › 375 mm x 650 mm (ex-stock)
- › 375 mm x 1200 mm (indent)
- › 500 mm x 900 mm (indent)
- › 500 mm x 1200 mm (indent).

PSP provides the following Dumawall Aluminium trims:

- › finishing trim
- › click finishing trim
- › universal corner 12-20 mm
- › inside corner 12 mm
- › L-trim outside corner 16-12 mm
- › start trim.

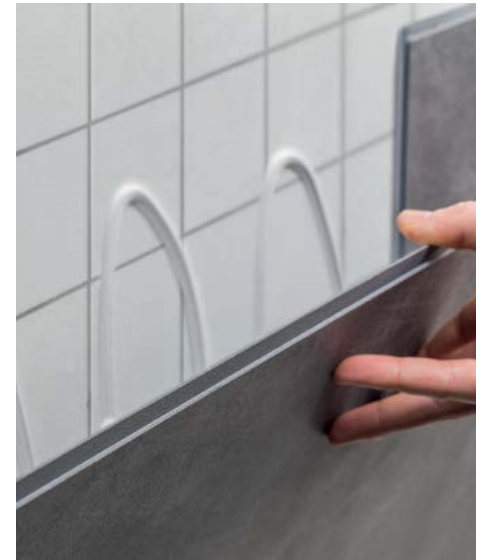

For further assistance please contact:

- ☎ 0800 786 883
- ✉ info@psp.co.nz
- 🌐 www.dumawall.co.nz



SCOPE AND LIMITATIONS OF USE

Scope	Limitations
Building On any internal wall panel substrate that complies with the NZ Building Code or where the designer and/or installer have established that the substrate is suitable for the intended building work.	<ul style="list-style-type: none"> › In buildings where material group number 3 or greater is permitted. › Not to be installed behind heat sources such as hobs. › Adhesive to be Dumafix PVC glue or SikaFlex 123 MS.



USEFUL INFORMATION

For information on the installation and maintenance of Dumawall+ Waterproof Wall Tiles, and for our warranty, refer to www.dumawall.co.nz.

PERFORMANCE CLAIMS

If designed, installed and maintained in accordance with all PSP Ltd requirements, Dumawall+ Waterproof Wall Tiles will comply with or contribute to compliance with the following performance claims.

NZ Building Code clauses	BASIS OF COMPLIANCE	
	Compliance statement 1	Demonstrated by
B1 Structure B1.3.1 B1.3.2 B1.3.3 (a, j, q)	ALTERNATIVE SOLUTION EN 13245-2:2008.	<ul style="list-style-type: none"> › Manufacturer certified with CE mark to EN 13245-2:2008. › Passed uPVC impact resistance test at 23°C.
B2 Durability B2.3.1 (c)	ALTERNATIVE SOLUTION EN 13245-2:2008.	<ul style="list-style-type: none"> › Manufacturer certified with CE mark to EN 13245-2:2008. › Passed uPVC impact resistance test at 23°C.
C3 Fire affecting areas beyond the source C3.4 (a)	ACCEPTABLE SOLUTION EN 13501-1:2013. MBIE Guidance.	<ul style="list-style-type: none"> › Manufacturer certified with CE mark to EN 13245-2:2008. › Material Group 3: Class D EN 13501-1:2013. › Crepim determination based on testing carried out by manufacturer. › Crepim accredited for testing.
E3 Internal Moisture E3.3.4 E3.3.5 E3.3.6	ALTERNATIVE SOLUTION EN 13245-2:2008.	<ul style="list-style-type: none"> › Manufacturer certified with CE mark to EN 13245-2:2008.
F2 Hazardous Building Materials F2.3.1	ALTERNATIVE SOLUTION EN 16516:2017 ISO 16000 (PARTS 3, 6, 9, 11) 2006-2011 DEPENDING ON PART EN 717-1:2004	<ul style="list-style-type: none"> › Tested by Eurofins for VOC emissions and formaldehyde release to EN 16516:2017, ISO 16000 (parts 3, 6, 9, 11) 2006-2011 depending on part, and EN717-1:2004. › Eurofins accredited for testing.

1. The Compliance Statement is the pass holder's statement that they have met their obligations under s14G(2) of the Building Act 2004.

SOURCES OF INFORMATION²

The following information was relied upon to prepare this pass:

- › EN 13245-2:2008 PVC-U profiles and PVC-UE profiles for internal and external wall and ceiling finishes.
- › Eurofins Product Testing: VOC Emission Test Report 7/08/2018.
- › Crepim: Classification report of reaction to fire performance 1039/117/236A 16/11/2017.

2. Sources of information also include the Building Act 2004 and its regulations, including the Building Code (Schedule 1 of the Building Regulations 1992), Acceptable Solutions and Verification Methods, and relevant cited standards.

- › CE Declaration of performance: Dumaplast DPO-CPR-6 28/05/2017.

Scan or click this QR code for a full download of Compliance Documentation for this pass™.
www.dumawall.co.nz



VERSION:
.....

DATE:
.....

Note: Uncontrolled in printed format.

NAME:
.....

Vaughan Brown

POSITION:
.....

Business Unit Manager –
Building Brands

Signed on behalf of PSP NZ:



By signing this pass™ the signatory confirms that, in respect of the subject of this pass™, the company has met their s14G obligations under the Building Act 2004.

320 Rosedale Road, Albany or PO Box 101 851 NSMC, Auckland 0745 › 0800 786 883 › info@psp.co.nz › www.dumawall.co.nz